


219*Y H03VVH2-F Technical Data Sheet

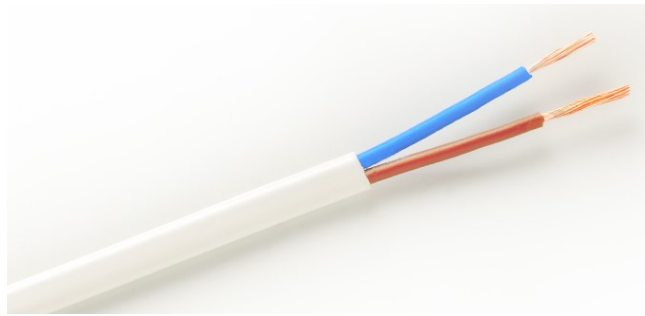

◀ HAR ▶

Rated voltage	Max. operating temperature	Minimum bending radius
300/300V	+70°C	Fixed installation: 4 x OD Flexing installation: 6 x OD

<u>Conductor:</u>	Class 5, copper conductor to BS EN 60228
<u>Insulation:</u>	T11 PVC insulation
<u>Sheath:</u>	TM2 PVC sheath
<u>Standards:</u>	BASEC and HAR approval BS EN 50505-2-11:2011
<u>Core colours:</u>	2 Core: Blue Brown 3 Core: Green/Yellow Blue Brown 4 Core: Green/Yellow Brown Black Grey

Size (core x mm)	Insulation thickness (mm)	Sheathed thickness (mm)	Mean overall diameter (mm)	Conductor resistance (Ω/km)	Approximate weight (kg/km)
2 x 0.5	0.50	0.60	3.4 x 5.3	26.0	32
2 x 0.75	0.50	0.60	3.5 x 5.5	39.0	35