


As Type 8723 LSF Grey Technical Data Sheet

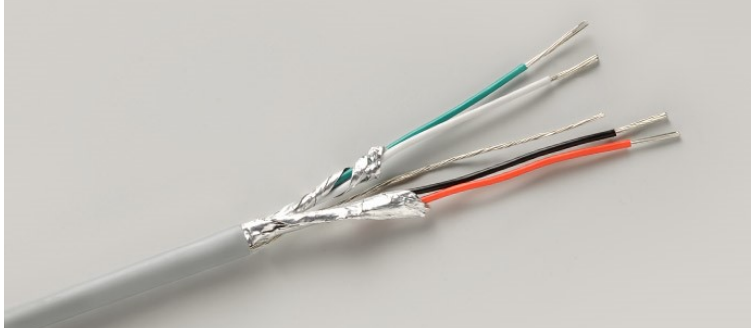

| Rated voltage | Rated temperature | Max. conductor resistance | Nom. capacitance conductor to conductor | Max. recommended current |
|---------------|-------------------|---------------------------|---|--------------------------|
| 300V | -20°C to +70°C | 59.2 Ω/km | 110 pF/m | 2.3A |

| | |
|---------------------------|-------------------------------|
| <u>Conductor:</u> | Tinned stranded copper |
| <u>Size:</u> | 22AWG x 2P |
| <u>Construction:</u> | 7/0.25mm |
| <u>Insulation:</u> | PP (Polypropylene) |
| <u>Nominal thickness:</u> | 0.22mm |
| <u>Outer Diameter:</u> | 1.15(±0.05mm) |
| <u>Colour:</u> | P1: Red/Black P2: Green/White |
| <u>Pitch:</u> | 45(±5mm) |
| <u>Screen:</u> | Individual aluminium-mylar |
| <u>Drain wire:</u> | 7/0.2mm, tinned copper |
| <u>Jacket:</u> | Grey, LSF |
| <u>Max. diameter:</u> | 4.2(±0.2mm) |
| <u>Nom. thickness:</u> | 0.5mm |