


As Type 8205 LSOH 600V Technical Data Sheet

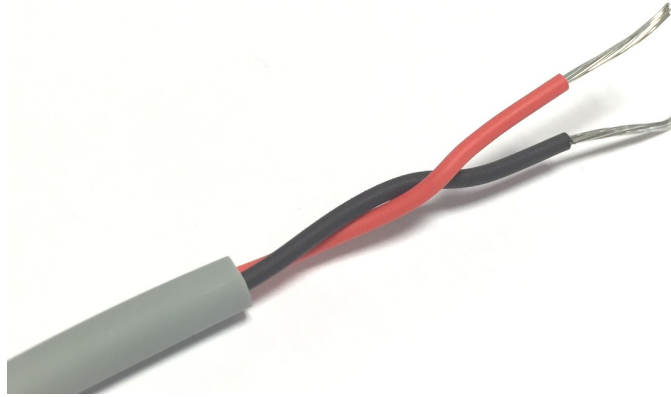

Rated voltage	Rated temperature	Max. conductor resistance	Nom. capacitance conductor to conductor	Max. recommended current
600V	-20°C to +70°C	36.8Ω/km	80.4pF/m	3.7A

<u>Conductor:</u>	Tinned stranded copper
<u>Size:</u>	20AWG x 1P
<u>Construction:</u>	7/0.30mm
<u>Insulation:</u>	LSOH
<u>Nominal thickness:</u>	0.4mm
<u>Outer Diameter:</u>	1.75(±0.1mm)
<u>Colour:</u>	Black, Red
<u>Twisted pair:</u>	2 cores twisted together
<u>Pitch:</u>	50(±5mm)
<u>Jacket:</u>	Grey, LSOH
<u>Max. diameter:</u>	4.8(±0.20mm)
<u>Nom. thickness:</u>	0.65mm