


As Type 8760 LSOH 600V UV Resistant Technical Data Sheet

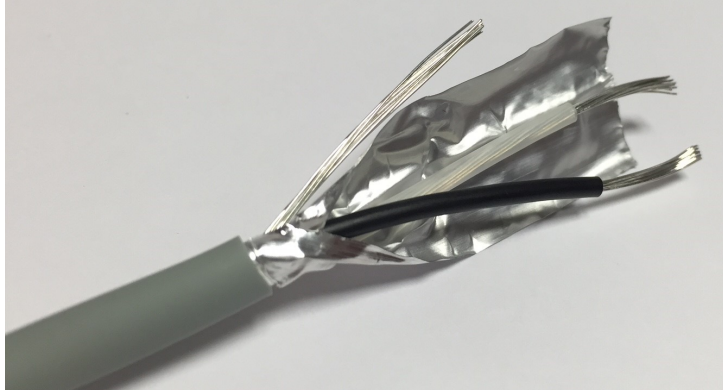

Rated voltage	Rated temperature	Max. conductor resistance	Nom. capacitance conductor to conductor	Max. recommended current
600V	-20°C to +70°C	23.5Ω/km	89.2pF/m	7.2A

<u>Conductor:</u>	Tinned stranded copper
<u>Size:</u>	18AWG x 1P
<u>Construction:</u>	16/0.25mm
<u>Insulation:</u>	PE (Polyethylene)
<u>Nominal thickness:</u>	0.45mm
<u>Outer Diameter:</u>	2.15(±0.1mm)
<u>Colour:</u>	Black, Clear
<u>Pitch:</u>	60(±5mm)
<u>Screen:</u>	Overall aluminium-mylar
<u>Drain wire:</u>	7/0.3mm, tinned copper
<u>Jacket:</u>	Grey, LSOH UV Resistant
<u>Max. diameter:</u>	5.7(±0.20mm)
<u>Nom. thickness:</u>	0.7mm