


As Type 9402 LSOH 600V Technical Data Sheet

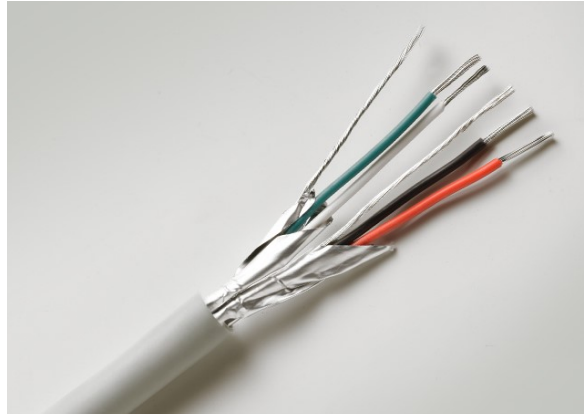

Rated voltage	Rated temperature	Max. conductor resistance	Nom. capacitance conductor to conductor	Max. recommended current
600V	-20°C to +70°C	36.8Ω/km	180pF/m	3.1A

<u>Conductor:</u>	Tinned stranded copper
<u>Size:</u>	20AWG x 2P
<u>Construction:</u>	7/0.3mm
<u>Insulation:</u>	LSOH
<u>Nominal thickness:</u>	0.3mm
<u>Outer Diameter:</u>	1.50(±0.1mm)
<u>Colour:</u>	P1: Red/Black. P2: Green/White
<u>Screen:</u>	Individual aluminium-mylar
<u>Drain wire:</u>	19/0.16mm, tinned copper
<u>Jacket:</u>	Grey, LSOH
<u>Max. diameter:</u>	7.6(±0.3mm)
<u>Nom. thickness:</u>	1.0mm