


## As Type 9501 LSOH 600V Technical Data Sheet

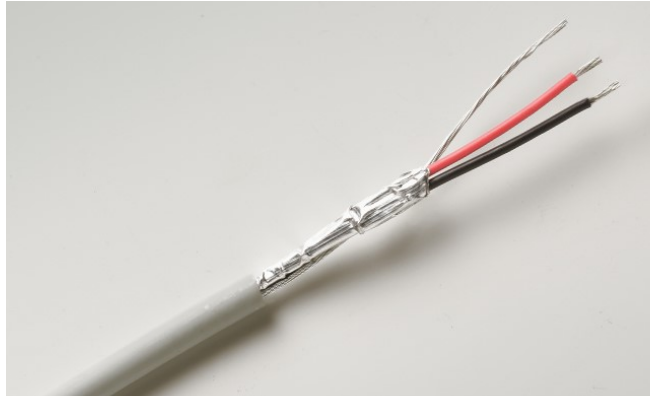

Rated voltage	Rated temperature	Max. conductor resistance	Nom. capacitance conductor to conductor	Max. recommended current
600V	-20°C to +70°C	94Ω/km	98.4pF/m	1.7A

<u>Conductor:</u>	Tinned stranded copper
<u>Size:</u>	24AWG x 1P
<u>Construction:</u>	7/0.2mm
<u>Insulation:</u>	PE (Polyethylene)
<u>Nominal thickness:</u>	0.3mm
<u>Outer Diameter:</u>	1.2(±0.05mm)
<u>Colour:</u>	P1: Black/Red
<u>Pitch:</u>	45(±5mm)
<u>Screen:</u>	Overall aluminium-mylar
<u>Drain wire:</u>	7/0.2mm, tinned copper
<u>Jacket:</u>	Grey, LSOH
<u>Max. diameter:</u>	4.0(±0.20mm)
<u>Nom. thickness:</u>	0.65mm