



6 Core Alarm Cable LSF (TCCA) Technical Data Sheet

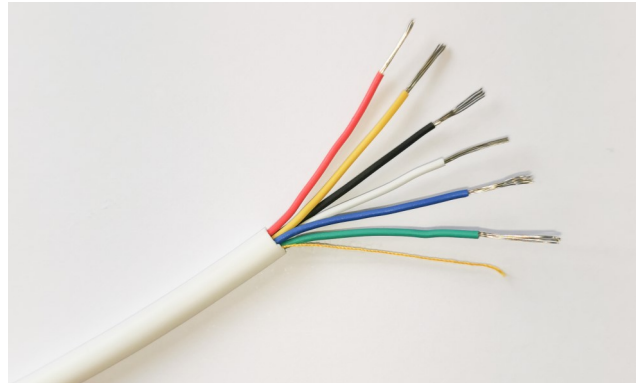

Conductor DC resistance at 20°C	Insulation DC resistance at 20°C	Rated Voltage	Rated Temperature
$<15.53\Omega/100M$	$>500M\Omega/*M$	40V	80°C

<u>Conductor:</u>	Tinned Copper Clad Aluminium
<u>Nominal overall diameter:</u>	0.19 x 7 (± 0.008)
<u>Insulation:</u>	LSF
<u>Insulation diameter:</u>	1.00(± 0.10)mm x 6
<u>Insulation colours:</u>	Green, White, Red, Blue, Yellow, Black
<u>Rip-cord material:</u>	Nylon, yellow
<u>Sheath overall diameter:</u>	4.00 (± 0.18)mm
<u>Sheath:</u>	LSF, White, clean and smooth
<u>Test standard:</u>	BS4737 3.30 UL1581

8 Core Alarm Cable LSF (TCCA) Technical Data Sheet

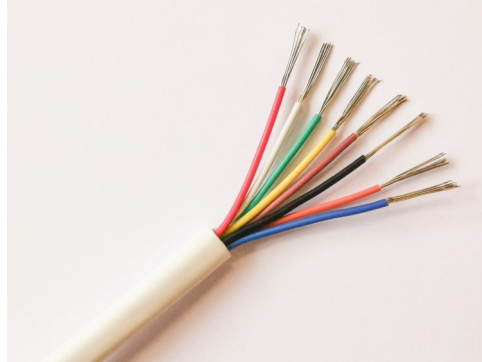

Conductor DC resistance at 20°C	Insulation DC resistance at 20°C	Rated Voltage	Rated Temperature
<15.53Ω/100M	>500MΩ/*M	40V	80°C

<u>Conductor:</u>	Tinned Copper Clad Aluminium
<u>Nominal overall diameter:</u>	0.19 x 7 (±0.008)
<u>Insulation:</u>	LSF
<u>Insulation diameter:</u>	1.00(±0.10)mm x 8
<u>Insulation colours:</u>	Green, White, Red, Blue, Yellow, Black, Brown, Orange
<u>Rip-cord material:</u>	Nylon, yellow
<u>Sheath overall diameter:</u>	4.30 (±0.20)mm
<u>Sheath:</u>	LSF, White, clean and smooth
<u>Test standard:</u>	BS4737 3.30 UL1581