


As Type 9418 LSOH 600V UV Resistant Technical Data Sheet

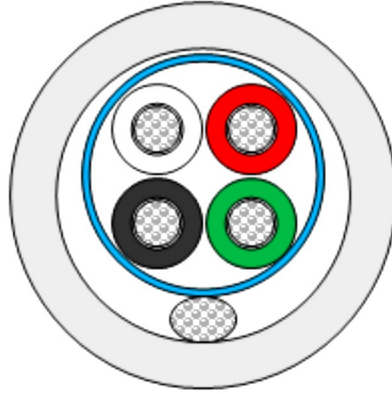

Rated voltage	Rated temperature	Max. conductor resistance	Nom. capacitance conductor to conductor	Max. recommended current
600V	-20°C to +70°C	23.5Ω/km	130pF/m	5A

<u>Conductor:</u>	Tinned stranded copper
<u>Size:</u>	18AWG x 4C
<u>Construction:</u>	19/0.25mm
<u>Insulation:</u>	PE (Polyethylene)
<u>Nominal thickness:</u>	0.3mm
<u>Outer Diameter:</u>	1.85(±0.1mm)
<u>Colour:</u>	Red, Green, Black, White
<u>Construction:</u>	4 cores laid up together
<u>Pitch:</u>	65(±5mm)
<u>Screen:</u>	Overall aluminium-mylar
<u>Drain wire:</u>	7/0.3mm, tinned copper
<u>Jacket:</u>	Grey, LSOH UV Resistant
<u>Max. diameter:</u>	6.2(±0.2mm)
<u>Nom. thickness:</u>	0.9mm