


NYY-J High-Tuff Technical Data Sheet

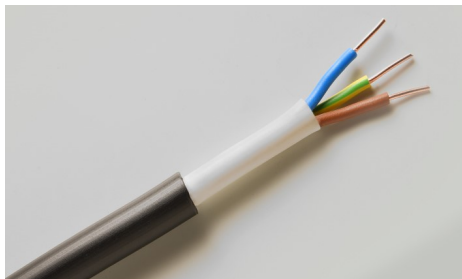

Rated voltage	Rated temperature
600/1000V	+70°C

<u>Conductor:</u>	Class 1 bare copper conductor to EN 60228
<u>Insulation:</u>	PVC
<u>Sheath:</u>	PVC, Black
<u>Core colours:</u>	3 cores: Green/Yellow, Blue, Brown 4 cores: Green/Yellow, Brown, Black, Grey 5 cores: Green/Yellow, Blue, Brown, Black, Grey
<u>Standards:</u>	IEC 60502-1
<u>Application:</u>	Power and control cable for fixed installation, suitable for indoor/outdoor applications.

Size (mm)	Stranding	Insulation thickness (mm)	Mean overall diameter (mm)	Max. DC resistance at 20°C (Ω/km)	Approximate weight (kg/km)
3 x 1.5	Class 1	0.80	10.21	12.1	165
3 x 2.5	Class 1	0.80	11.02	7.41	200
3 x 4	Class 1	1.00	13.03	4.61	285
3 x 6	Class 1	1.00	14.11	3.08	372
4 x 1.5	Class 1	0.80	11.07	12.1	193
4 x 2.5	Class 1	0.80	11.88	7.41	242
5 x 1.5	Class 1	0.80	11.68	12.1	221
5 x 2.5	Class 1	0.80	12.82	7.41	300
5 x 4	Class 1	1.00	15.19	4.61	408
5 x 6	Class 1	1.00	16.00	3.08	620